

BMQ

Pelletizing Solutions

APPLICATION

The Counter Current Cooler has a cooling capacity of 0.5-40 tons of pellets per hour.

FEATURES

- Hydraulic, pneumatic or electrically driven discharge system with positioning sensors for discharge control
- All-over discharge system
- 3 pcs. fill level sensors mounted at the door of the cooling chamber
- Electronic temperature sensor 4...20mA for temperature monitoring without evaluation (signal processing is performed by a control provided by the customer)
- Sprinkler installation is optionally available (Standard for wood pellets)
- Airlock on the cooling covering with directly coupled driving motor



OPTIONS

- Moving floor discharge
- Discharge system via vibratory trays


Counter Current Cooler

www.bmqinc.com

BMQ

BMQ, Inc.
209 Quality Avenue, Ste 9
New Albany, IN 47150
Phone: (812) 923-4992

Counter Current Cooler

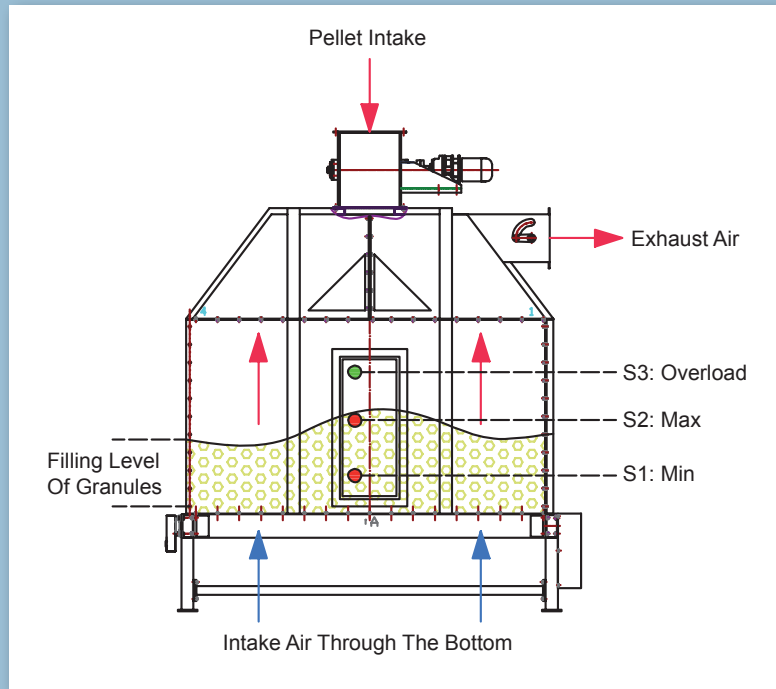

SPECIFICATIONS

	SDCC5	SDCC10	SDCC15	SDCC20	SDCC25	SDCC30
1. Capacity to/h*	5	10	15	20	25	30
2. HP	1	1	1.5	1.5	1.5	1.5
3. ft ³	79.5	141	183.5	254	314	360
4. L (inch)	84.64	106.3	106.3	120	133.85	142.5
5. B/W (inch)	66.14	86.61	86.61	100.4	113.38	120.5
6. H (inch)**	111.81	117.71	130	131.88	133.85	145.66

* approx. on mixed feed, dia 6 mm

** The indications of the total height do not include any drop-out funnel

www.bmqinc.com

BMQ

BMQ, Inc.
209 Quality Avenue, Ste 9
New Albany, IN 47150
Phone: (812) 923-4992